


55-0000CY-BK  
INSTRUCTIONS

# PREMIUM RESIN REEL SYSTEM FOR INGROUND POOL

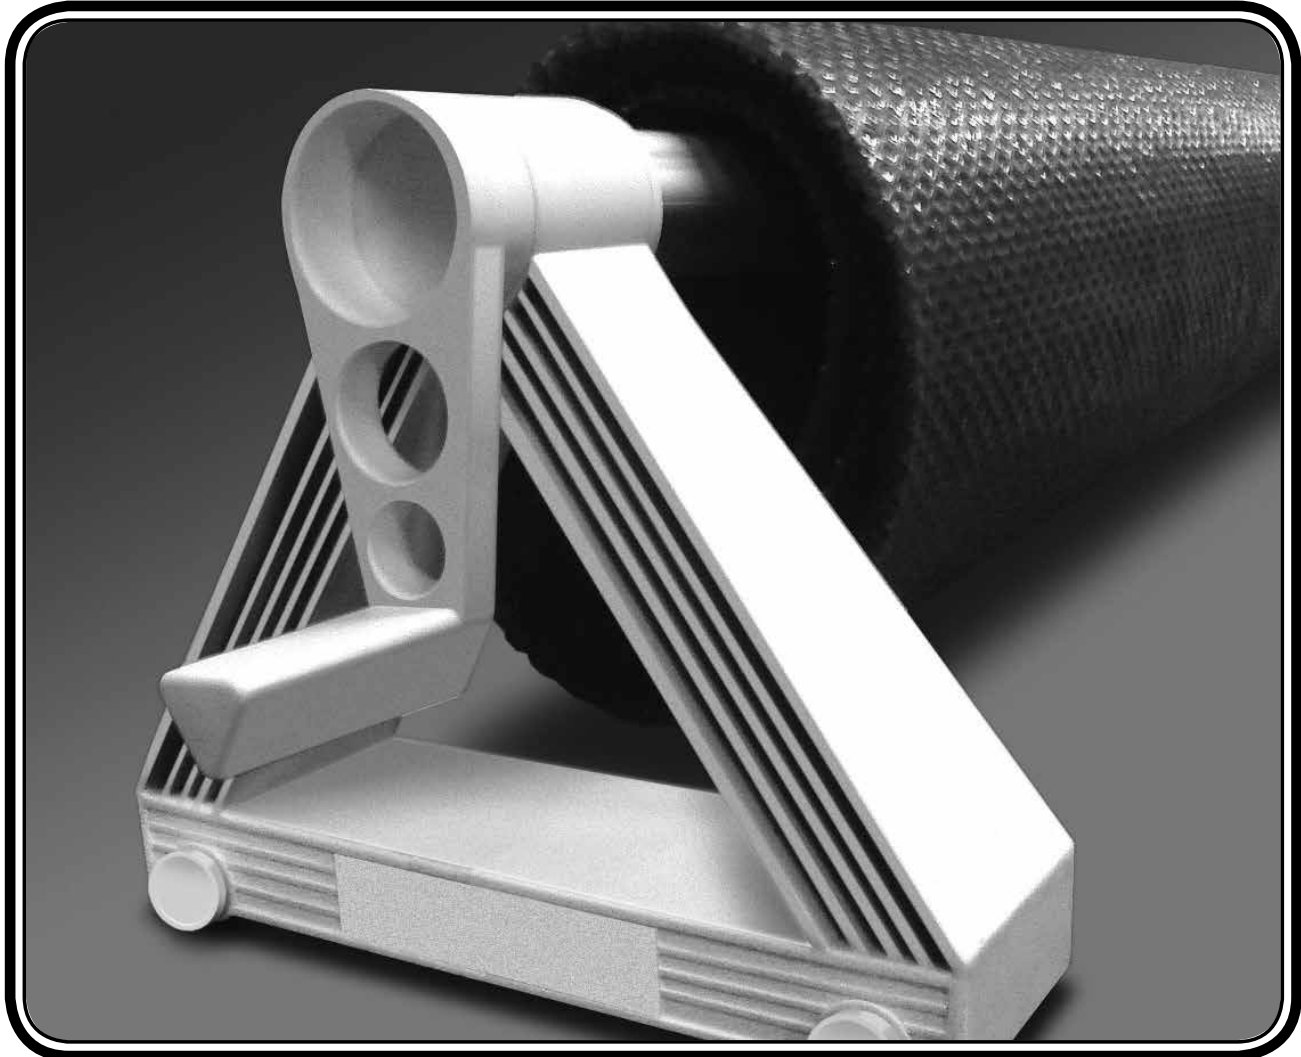

REGISTER WARRANTY ONLINE AT [WWW.GLIPOOLPRODUCTS.COM](http://WWW.GLIPOOLPRODUCTS.COM).

*PLEASE REGISTER WITHIN 10 DAYS OF PURCHASE.*

IF YOU WISH TO MAKE A CLAIM, CALL TOLL FREE 1-800-448-2343


FOR REPLACEMENT PARTS FOR YOUR REEL SYSTEM PLEASE VISIT, [WWW.GLIPROMOTIONS.COM](http://WWW.GLIPROMOTIONS.COM).





Youngstown, Ohio 44510 • [www.glipoolproducts.com](http://www.glipoolproducts.com)

# INSTALLATION INSTRUCTIONS

1. CONGRATULATIONS on your purchase of our Premium Resin Solar Reel for Inground Pools. Please follow the instructions carefully so as to not void warranty.
2. Please use your solar blanket and reel assembly in the manner it was intended for:
  - a. Your solar blanket is not a safety cover
  - b. Remove the solar blanket and solar reel assembly from the pool completely before swimming use.
  - c. Do not store the solar blanket on the ground in direct sunlight, as it will burn the lawn
3. Preparation & Assembly: Check inventory of all items and assemble as illustrated below:

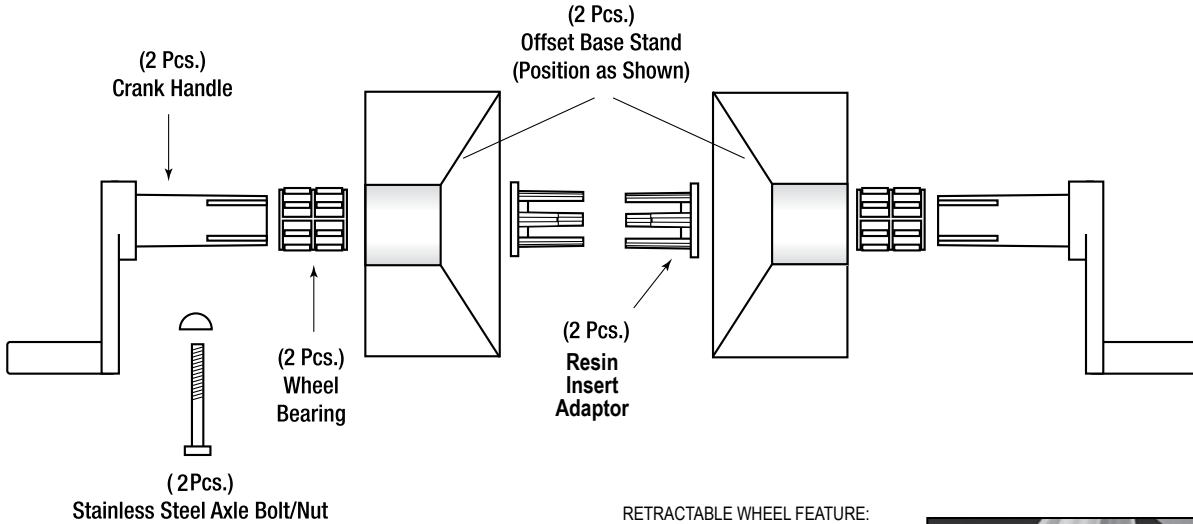


**RETRACTABLE WHEEL FEATURE:**  
 To expose wheels, tilt the reel stand in one direction to remove weight from the stand. Raise locking tooth and rotate thumbwheel clockwise. Lower the locking tooth to re-lock. To hide wheels, raise locking tooth and rotate thumbwheel counter clockwise. Lower locking tooth to re-lock.

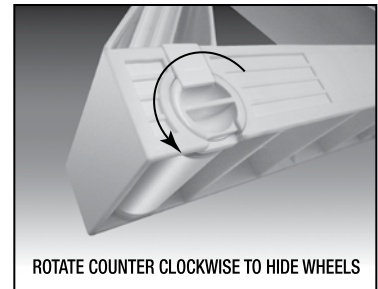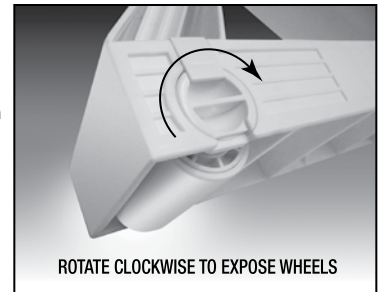

| PARTS BREAKDOWN |               |   |   |
|-----------------|---------------|---|---|
| PART NUMBER     | DESCRIPTION   | QUANTITY                                      |   |
| 1               | 99-55-4395026 | Off-set triangular base with built in casters | 2 |
| 2               | 99-55-4395002 | Crank handle                                  | 2 |
| 3               | 99-55-4395003 | Resin roller bearings - Installed             | 2 |
| 4               | 99-55-4395004 | 3" Resin insert adaptor                       | 2 |
| 5               | 99-55-4395013 | 2.83" Axle bolt (In Hardware Bag)             | 2 |
| 6               | 99-55-4395015 | Strap Kit/Hardware Bag                        | 1 |

- STRAP KIT**
- (11 Pcs.) Plastic Screw (1 extra piece)
  - (21 Pcs.) Plastic Strap Plate (1 extra piece)
  - (11 Pcs.) Stainless Steel Self-Drilling Screws (1 extra piece)
  - (1 Pc.) Driver Bit
  - (10 Pcs.) Fabric Straps (1 extra piece)

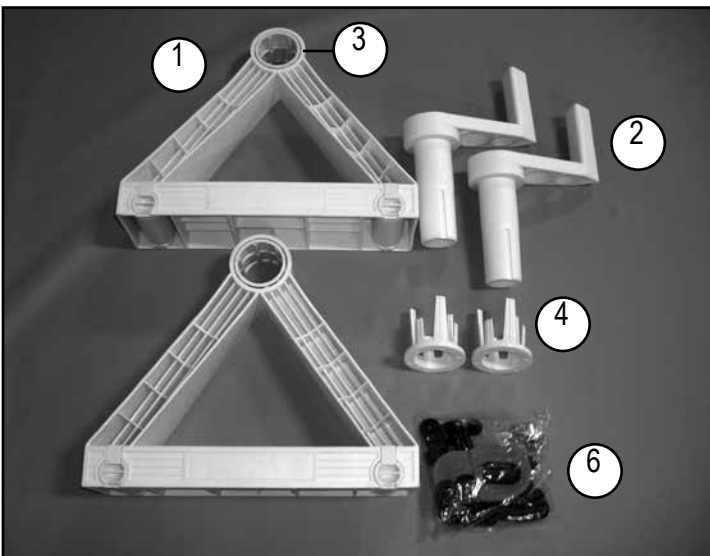

4. Depending upon the size of your pool you will also require one of the following Storage Kits: (Storage Kit assembly is detailed below.)

**PART # 55-1203IG-TK**  
**12' X 3' IGR STORAGE KIT**  
 (2) 59.5" x 2.75" Dia. Inner Tube  
 (1) 59.5" x 2.95" Dia. Outer Tube  
 (4) 3" Through Bolt with Nut  
 (1) Drill Bit  
 (2) 24" Storage Straps  
 (2) Wood Screw Storage Hooks  
 Max. Finished length = 13' 3/8"

**PART # 55-1603IG-TK**  
**16' X 3' IGR STORAGE KIT**  
 (2) 72" x 2.75" Dia. Inner Tube  
 (1) 72" x 2.95" Dia. Outer Tube  
 (4) 3" Through Bolt with Nut  
 (1) Drill Bit  
 (2) 24" Storage Straps  
 (2) Wood Screw Storage Hooks  
 Max. Finished length = 16' 1/2"

**PART # 55-2003IG-TK**  
**20' X 3' IGR STORAGE KIT**  
 (3) 59.5" x 2.75" Dia. Inner Tube  
 (2) 59.5" x 2.95" Dia. Outer Tube  
 (8) 3" Through Bolt with Nut  
 (1) Drill Bit  
 (2) 24" Storage Straps  
 (2) Wood Screw Storage Hooks  
 Max. Finished length = 21' 3/4"

**PART # 55-2004IG-TK**  
**20' X 4' IGR STORAGE KIT**  
 (3) 59.5" x 3.75" Dia. Inner Tube  
 (2) 59.5" x 4.0" Dia. Outer Tube  
 (8) 4" Through Bolt with Nut  
 (2) 3.75" Axel Bolt with Nut  
 (2) 4" metal insert adaptor  
 (2) 4" resin insert adaptor  
 (1) Drill Bit  
 (2) 24" Storage Straps  
 (2) Wood Screw Storage Hooks  
 Max. Finished length = 21' 3/4"

**PART # 55-2404IG-TK**  
**24' X 4' IGR STORAGE KIT**  
 (4) 68" x 3.75" Dia. Inner Tube  
 (3) 68" x 4.0" Dia. Outer Tube  
 (12) 4" Through Bolt with Nut  
 (2) 3.75" Axel Bolt with Nut  
 (2) 4" metal insert adaptor  
 (2) 4" resin insert adaptor  
 (1) Drill Bit  
 (2) 24" Storage Straps  
 (2) Wood Screw Storage Hooks  
 Max. Finished length = 25' 3/8"

5. Positioning Your Solar Reel:

For Rectangular pools, place Wheels at either end of pool. (See Fig. A)

For Irregular shaped pools, place Stands at some convenient midway point. You will need to fold Blanket and allow Blanket to unwind in two directions. (See Fig. B)

Fig. A

**RECTANGULAR**


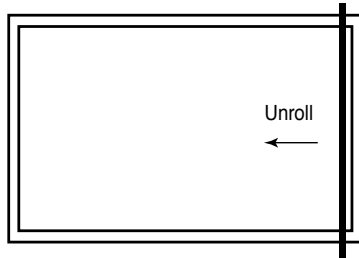


Fig. B

**IRREGULAR**

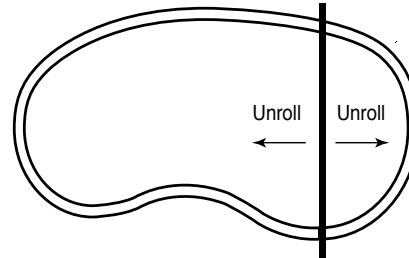


6. Trimming Your Solar Blanket:

- Lay your Solar Blanket (not provided) on top of water. **IMPORTANT!** Irregular Shaped Pools will need to have their solar covers folded at point of placement of Stands! The cover will unroll left and right of stands & cross pole. Please allow 6 inches more material on length to allow for a fold where straps will be attached to wind onto reel system. (See Fig. B above)
- With scissors trim blanket to fit shape of pool. Be sure to clear pool edge coping.

7. Assembling The Storage Kit:

All Storage Kits consist of 6 sided Hexagon shaped tubing. There are two diameters of tubing, the smaller size nesting into the larger size. All Storage Kits begin and end with small tubes. The resin insert adaptor requires CAREFUL ALIGNMENT!

### STORAGE KIT ASSEMBLY:

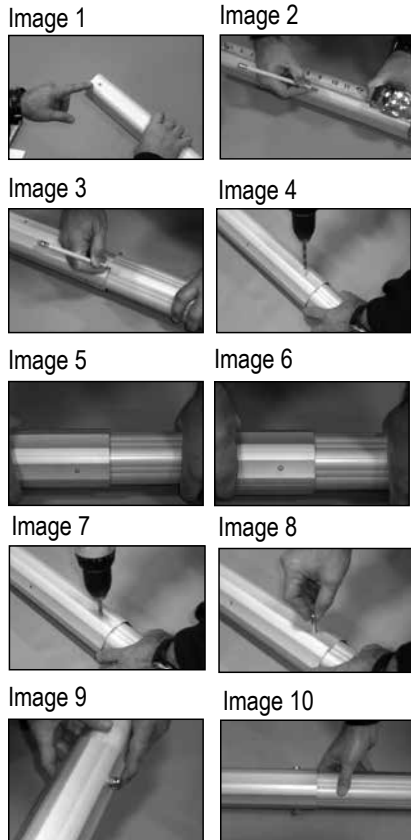


- All storage kits consist of hexagon shaped tubing. There are two diameters of tubing; the smaller diameter will insert into the larger diameter.
- Determine length of tube required for your installation. Maximum finished length per storage kit size listed above (in Step 4).  
*Please Note: The smaller diameter tube will be used on both ends of the reel and will connect to the base unit. Two of the smaller diameter tubes will have pre-drilled axle bolt holes on one end. The pre-drilled end will be connected to the base unit. (Image 1)*
- Loosely assemble tubes together to match the desired length for your installation, evenly dividing the excess at each connection. Note that the smaller diameter tube must be inserted a minimum of 9" into the larger diameter tube at each connection. Tip: Measure in 9" from end of smaller diameter tube and make a mark with a pencil. (Image 2) The tube must be inserted at least to your pencil mark. It is ok if tube is inserted more than 9", but not less.
- Once you determine length and have proper spacing of tubes, mark each tube at the connection point for reference. (Image 3) This will eliminate the need to re-measure if your tubes get moved during the remainder of the installation process.
- Each connection will be fastened together with the through bolts supplied in your Storage Kit. Use the pre-drilled holes in the larger diameter tube as a guide to drill the smaller inner tube. (Image 4) Twist tubing to remove excess play prior to drilling holes. (Image 5 - Before Twisting, Image 6 - After Twisting) (Fig. C on last page) Drill from each side with the drill bit supplied. (Image 7)
- Fasten with 2 bolts and nuts at each connection. (Image 8, Image 9, Image 10)
- For off-season storage of Solar Blanket - Install wood screw hooks into fence, wall or even hang from garage or shed ceiling. Be sure to install hooks into solid wood posts or studs. Roll solar blanket onto the storage system and suspend from hooks using the enclosed storage straps.

Image 11



Image 12



3" DIAMETER STORAGE KITS:

(If you purchased a 4" diameter storage kit, go to 4" diameter storage kit instructions below.)

- a. Attach tube assembly to base unit.
- b. The resin insert adaptor must be inserted into the end of the tube. (Image 11)
- c. Insert Crank handle through the base unit and into the resin insert adaptor. (Image 12) Be sure to align the axle hole.
- d. Fasten tube to base unit using the 2.83" axle bolt that is packaged with your base kit. (Image 13)
- e. Repeat same procedure on opposite end.

Image 13



4" DIAMETER STORAGE KITS:

Note: The 4" storage kit is packaged with two metal insert adaptors and two resin insert adaptors. See pictures of each. (Image 14) You will use the large resin insert adaptors for your installation.

- a. The small resin insert adaptors that were packaged with the base kit and the large metal insert adaptors that were packaged with the storage kit can now be discarded as they will not be used. *These can be seen in Image 14, and are noted to be discarded.*
- b. The resin insert adaptor must be inserted into the end of the tube. (Image 15)
- c. Insert Crank handle through the base unit and into the resin insert adaptor. Be sure to align axle hole. (Image 16)
- d. Fasten tube to base unit using the 3.75" axle bolt that is packaged with your storage kit. (Image 17) *Note: the 2.83" axle bolt that is packaged with your base kit can be discarded as it will not be used.*
- e. Repeat same procedure on opposite end.

Image 14



Image 15



Image 16




Image 17




8. Attach Straps to Tubes:


Come in 6 inches from each tube end and attach a strap plate to the tube assembly. Use the self drilling screws on the drill line to attach the plate. Look at the holes that were pre-drilled at the factory and use the same drill line. There are 6 lines on each tube. Take the remaining strap plates and connect them evenly along the length of the tube assembly. Attach straps to strap plate. (Fig. D)

9. Attach Solar Blanket to Straps:

If reel is to be placed at the end of the pool, attach cover to strap plate with plastic screw. (Fig. E) If reel is to be placed in offset position, then attach cover to strap plate forming a fold to act like a hinge and the plastic screw will go through two layers of the solar blanket. (Fig. F) Bubbles should face down.



Twist Tubing To Remove Excess Play Prior To Screwing Together.



Thread Strap as Shown

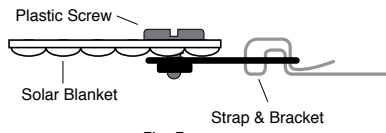


Fig. E

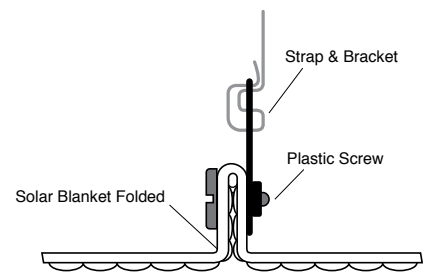


Fig. F

